





Grilling and frying.

Higher productivity, better results.

TriLax coating

The RATIONAL accessories coated with TriLax have excellent heat conductivity, they have been developed for grilling, frying, roasting and baking and can be used in temperatures up to 300 °C. The robust non-stick coating also supports browning.

• Roasting and baking tray

The universal tray for fish, meat, poultry pieces, roast potatoes, baked goods, vegetables and much more. Juicy with a nice crust.

2 Grilling and roasting tray

For juicy grilled meat, fish or vegetables. With a grill side for a traditional grill pattern and a frying side with a rim around the edge for pan fried food. The ideal addition for your à la carte service.

3 Grill and pizza tray

For fresh or convenience pizza, quiches and flatbreads. Grilling side for vegetables, fish and meat.

4 Multibake

Optimal portioning and consistant product sizes for fried eggs, omlettes, hash browns and tortillas.

6 Cross and stripe grill grate

With the classic grill stripes on the one side or the original American steakhouse pattern on the other. Extremely robust and durable. No preheating necessary.

CombiGrill griddle

For the preparation of large batches of grilled products. Preheating the grid is not necessary.

O Loading grid

Ideal addition to the CombiGrill griddle. For thin grilled products such as minute steaks or grilled vegetables. Place the food to be cooked on the loading grid, place it on the hot CombiGrill griddle and later remove.


® Roasting and baking pan

For classic pan dishes such as hash browns, tortillas, quiches, pancakes or small cakes such as tarte tatin. Griddled surface for fast heat input. With carrier tray for easy handling.

9 Granite-enamelled container

With fully contoured corners so no portion of any bake is lost. Thanks to the excellent heat conductivity, it is ideal for roasting, braising, pan-frying and baking. Almost indestructible.

Article numbers and more versions on page 32. Article numbers and more versions on page 32.

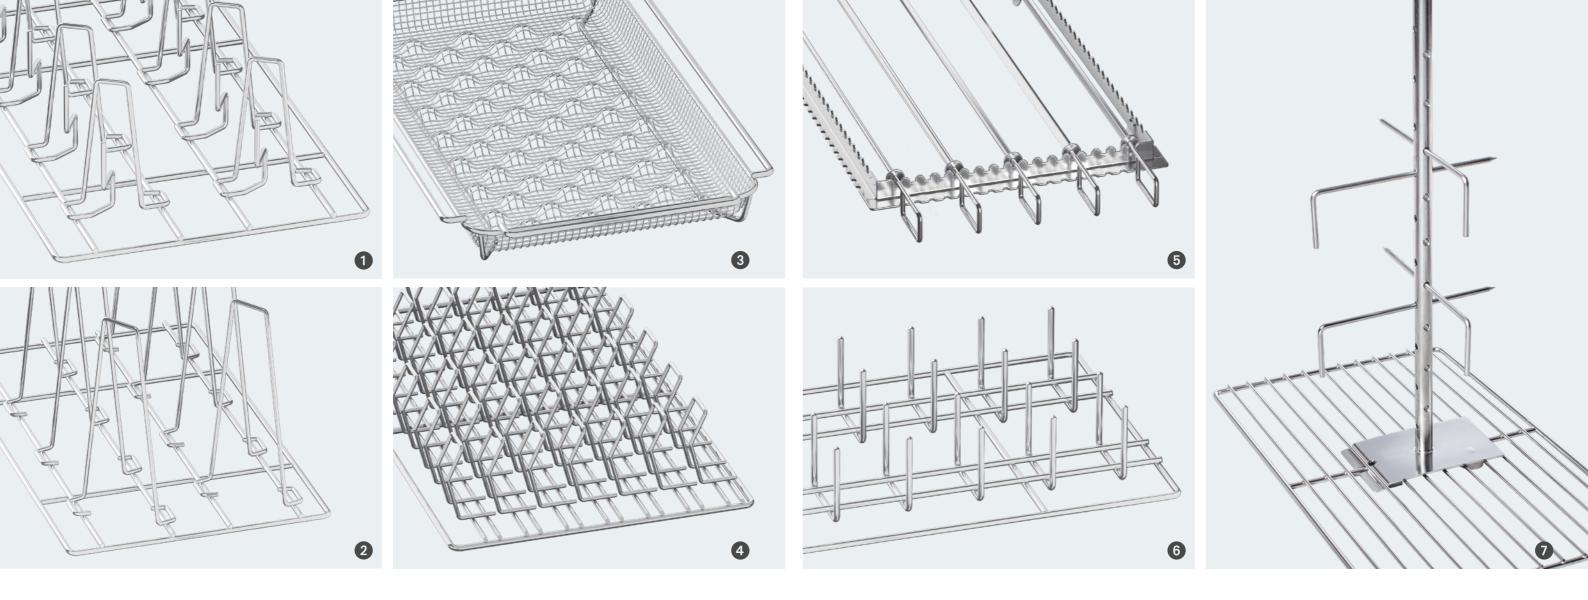

Special applications.

Special accessories for special requirements.

10 O Chicken and duck superspike

Significantly reduced cooking time thanks to standing arrangement of poultry and the associated chimney effect. For succulent breast meat and uniformly browned skin.

CombiFry

Large quantities of pre-fried products such as fish nuggets, chips and wedges with no added fat. Healthy and delicious.

Ribs rack

Optimal utilisation of the unit thanks to the vertical arrangement of the spare ribs with up to 3.5 kg per grill.

6 Grill and tandoori skewer

With round, square or rectangular cross-sections in different diameters for meat, fish, poultry or vegetables.

O Potato baker

Cook baked potatoes or corn on the cob without aluminium foil and up to 50 %* faster.

• Lamb and suckling pig spit

Easily prepare entire lambs or suckling pigs of up to 30 kg.

^{*} Compared to conventional kitchen technology.



Baking.

This is quality craftsmanship.

Muffin and timbale mould

Made from highly flexible material and has optimal non-stick properties for muffins and desserts. 100 ml filling volume.

2 Roasting and baking pan

Perfect for for small cakes like tartes tatin. The griddled base ensures fast heat input over the entire base. With special contoured carrier tray for easy handling.

Roasting and baking tray

The universal genius for baking: Bread rolls, croissants, danish pastries and much more with uniform browning, crispy crusts and fluffy interior.

Perforated baking tray

Ideal for bread, bread rolls, pretzels and for the production of all types of pre-baked products.

6 Granite-enamelled container

The corners of the containers are fully contoured so that no portions of cakes are lost. Excellent heat conductivity for uniform browning and light and airy tray bakes.

Mobile oven rack in bakery standard

A mobile oven rack replaces one hinging rack. For quick loading and unloading, made from high-grade stainless steel for high quality requirements and perfectly tailored to RATIONAL units.

Bakery standard hinging rack

Thanks to the L-shaped racks, the hinging racks can easily be loaded with baking trays. The larger rail distance means the total capacity of the RATIONAL unit can also be used for higher baked goods. Made from high-grade stainless steel for top quality requirements.















GN accessories.

Better by default.

Perforated container

Versatile, robust and durable accessory for steaming vegetables or for your buffet. Maximum perforation means the food is evenly steamed, and retains its colours and nutrients.

2 Containers

The material thickness of stainless steel RATIONAL containers is 33 % above the standard. This guarantees maximum stability even for large quantities, long service life and convenient handling without any sharp edges.

9 Grid

Ideal for cooking large roasts. Made from extremely stable and durable stainless steel.

Extras.

Even more possibilities.

• VarioSmoker

Aromatic smoky flavours without a smoking oven, directly from the combi-steamer. The VarioSmoker gives meat, fish and vegetables a natural smoky flavour and unmistakable colour, you can refine the intensity according to your preferences. Even low temperature cooking is not a problem. Getting started with smoking is simple thanks to plug & play: The intelligent cooking paths of the iCombi Pro regulate the VarioSmoker via the USB connection, guaranteeing an optimal and professional cooking and smoking result.


2 Pull-out rails

Smooth pull-out for cooking accessories facilitates quick loading and unloading of products in à la carte operation.

3 Externally attachable core probes

A special extra thin sous-vide core probe ensures that the core temperature of the product is achieved precisely without destroying the vacuum in the bag. The externally mounted core temperature probe can be used as a replacement option for the internal core temperature probe.

Article numbers and more versions on page 35. Article numbers and more versions on page 37.

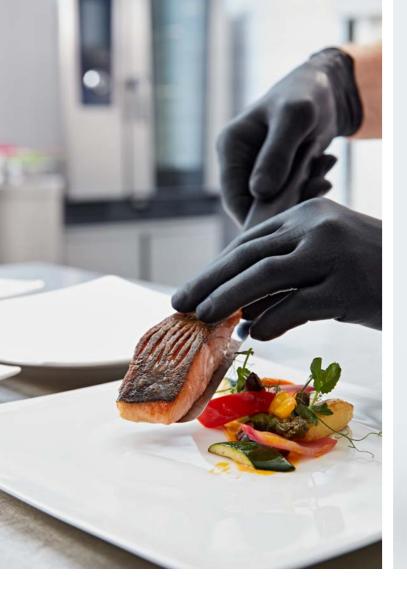











Finishing.

Consistent separation of production and output.

System for banqueting

20, 100 or several thousands of meals – with Finishing food is perfectly prepared without the stress, hectic rush or labour cost. Simply plate the appropriate number of plates cold and store them chilled in the mobile plate rack. The plates are then finished simultaneously using the Finishing process shortly before service. The Finishing system includes all accessories needed to start immediately (mobile plate rack, Thermocover, transport trolley).

Mobile plate racks

Made from high-grade stainless steel and perfectly tailored to the units. For fast loading and unloading for up to 120 plated plates in the iCombi Pro 20-2/1 (up to 31 cm diameter).

From special insulating materials to keep food hot for up to 20 minutes after Finishing. Easy to open and close with the simple magnetic seal. It is also easy to clean and store.

4 Run-in rail

For quick, ergonomic loading and unloading of mobile oven racks or mobile plate racks. Required for tabletop A separate run-in rail for Combi-Duo is required. units Model 6-1/1, 6-2/1, 10-1/1 and 10-2/1.

Transport trolley

Simple loading and unloading of the mobile oven rack in tabletop units. Safely transport food thanks to the large, quiet and hygienic tandem castors. Tailored to the height of the stand. Height-adjustable version for worktops.

1 Transport trolley for Combi-Duo

Safely load and unload both units in a single operation.







Combi-Duo.

Double the power.

1 Combi-Duo

Two units, easily combined. When there is little available space but you still need to steam and grill at the same time and the workload is the same, Combi-Duo provides two units which you can choose to control from the top unit. For more convenience. For more flexibility.

2 Integrated fat drain kit for Combi-Duo

Reliably collects dripping fat in the cooking cabinets and drains it into drip trays. Different versions available depending on the setup variation.

3 Setup variations for Combi-Duo

The levelling kit and the stands are made from highgrade stainless steel for stable and correct setup.

The setup variations:

- With a levelling kit to compensate for uneven floors:
 Low variation with low rack height, requires a floor
- Mobile kit with castors for easy cleaning and low rack height, requires a floor drain.
- Fixed setup with stand I for Combi-Duo or substructure with feet. No floor drain necessary.
- Mobile setup with stand I for Combi-Duo with swivel castors and parking brakes.

Stands.

Stable. Space-saving. Practical.

4 Levelling kit and stands

For the stable and balanced setup of your RATIONAL unit, we provide stands made from high-grade stable stainless steel in various versions: open, closed on the side or fully closed stands with doors. Support rails help store cooking accessories to save space. Mobile variations with stable castors and parking brakes enable the flexible positioning of the unit in the kitchen. All stands are designed in accordance with the applicable hygiene regulations.













Setup variations.

Convenient and practical.

• Installation kit for iCombi Pro XS 6-2/3 and CombiMaster Plus XS

The appearance also counts – so you can also integrate the small cooking system with an installation kit in your front of shop area. Space for a hood is already provided so you can install an UltraVent or UltraVent Plus as needed. This is supplied with a trim kit included to prevent the accumulation of dirt in less accessible areas.

MobilityLine floor cooking system (Model 20-1/1, 20-2/1)

A special frame with four robust castors and parking brakes, on which the floor unit is mounted, allows effortless mobility.

MobilityLine tabletop unit (Model 6-1/1 − 10-2/1)

The tabletop unit is firmly screwed to Stand II MobilityLine. Side bars protect the unit and together with the large stable castors, they facilitate mobility.

Exhaust air technology.

For a good work climate.

All extraction and condensation hoods

- > Have a timeless modern design
- > Have an easy to clean front with a removable cover
- > Adjust the extraction capacity with intelligent infinitely variable control of the fan depending on the situation, such as when opening the door. Installation is simple, and the system can be retrofitted at a later time, too.

• UltraVent


With its condensation technology, the UltraVent absorbs steam and vapours. No connection to the outside or extension of an existing exhaust system is necessary with this air recirculation hood.

UltraVent Plus

In addition to the UltraVent's condensation technology, the UltraVent Plus is equipped with special filter technology. This not only condenses vapours, but also reduces unpleasant fumes, for example when grilling and frying. RATIONAL units can be installed even in critical locations such as at the front of the store.

Security Extraction Hood

Steam and vapours are automatically extracted from the cooking cabinet and when opening the cooking cabinet door (without condensation technology). An external connection is required.

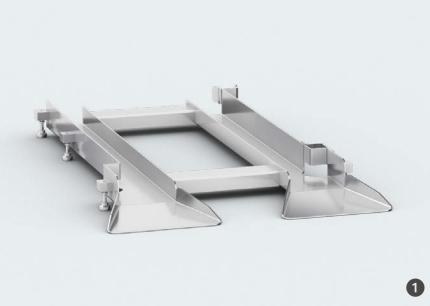



















Installation accessories.

An answer to every challenge.

• Trolley levelling device

The trolley levelling device compensates for inclinations (up to 3 %) in the kitchen floor ensuring that the mobile oven rack can be rolled smoothly into the RATIONAL unit.

2 Unit and mobile oven rack raiser

The ground clearance is increased by 70 mm. The mobile oven rack must be adjusted to the unit height accordingly.

Heat shield for right and left side panel

Retrofitting a heat shield allows you to place a radiant heat source (e.g. grill) near the right or left side panel.

4 Flow guard (for gas units only)

Used to extract exhaust gases through a pipe (diameter of exhaust gas pipe 180 mm).

• Handle holder for mobile oven rack

Provides a fixed storage location for the mobile oven rack handle, so that it is always within easy reach (included with delivery of floor units).

6 Condensation breaker

Accelerates the expulsion of steam and other vapours from the vent pipe. Steam and vapours can thus be diverted through a pipe into an extraction system.

Table extension

Prevents the accumulation of dirt and water by sealing the protruding underside of the iCombi Pro 6-1/1 and 10-1/1 when installed on a 700 mm deep worktop.

Output Unit connection kit

Consisting of a water inflow hose (2 m) and waste water pipes DN 50.

Wall mounting

For space-saving wall mounting. The attachment and mounting material (not included) must be designed in consultation with an architect/structural engineer and the building owner.

Article numbers and more versions on page 39. Article numbers and more versions on page 39.





















Care products.

Hygienically clean.

• Active Green cleaner tab (for iCombi Pro and iCombi Classic)

Keeps both the unit and the environment clean: The cleaner tab with its new formula is phosphate and phosphorous-free and reduces the quantity of cleaner by up to 50 %*. Without compromising on cleaning power and hygiene. Can perform an ultra-fast interim clean of the iCombi Pro in approx. 12 minutes

② Cleaner tab (for all SelfCookingCenter and CombiMaster Plus units)

Highly-concentrated and economical cleaner tabs with an intensive combination of active ingredients for high-performance cleaning power.

3 Care tab (for iCombi Pro, iCombi Classic and SelfCookingCenter units with Efficient CareControl)

2

Care substances actively protect against limescale in the steam generator and in the cooking cabinet before it even forms and extend the lifetime of the unit. Operational reliability without a water softener and time-consuming descaling.

4 Rinse aid tab (for SelfCookingCenter units without Efficient CareControl and CombiMaster Plus)

Active protection and extended lifetime thanks to high-efficiency care substances. Your cooking cabinet will be left gleaming with hygienic cleanliness.

- Defoamer tab (for all iCombi Pro, iCombi Classic, SelfCookingCenter and CombiMaster Plus units) Reduce foam when using heavily foaming water.
- **6** Grill cleaner (for all CombiMaster and ClimaPlus Combi units)

Liquid cleaner for hygienic cleanliness and care.

② Special cleaner soft (for all CombiMaster and ClimaPlus Combi units)

For dirt resulting from cooking applications < 200 °C, non-corrosive.

3 Rinsing chemical, liquid (for ClimaPlus Combi with CleanJet)

O Descaler (for SelfCookingCenter without Efficient CareControl, CombiMaster, ClimaPlus Combi)

For effective descaling of the steam generator with special care products.

Handheld pressure sprayer

Made of sturdy plastic, robust and easy to handle. The built-in pump mechanism generates the overpressure so that you can spray the areas to be cleaned at the push of a button with liquid cleaner or rinsing chemical.

21

20 Article numbers and more versions on page 39. Article numbers and more versions on page 39.


^{*} Compared to the previous Model.









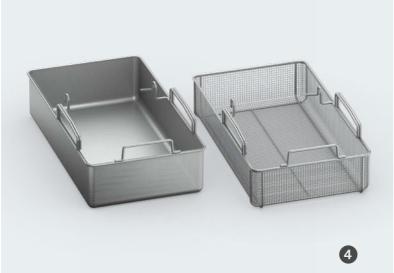









The basis for everything.

So you can work quicker, efficiently and more ergonomically.

O Scraper

To facilitate simple and ergonomic turning and removal of products. Also perfect for rolling and working with sweet and egg dishes, such as pancakes, omelettes and crepes. Stability and low weight thanks to sophisticated design.

2 Scoops

The scoop has been created for safe and easy emptying or portioning of large quantities of cooked food. Light, shock-resistant, scratch-resistant and temperature-resistant up to 250 °C.

Stir spatula

For stirring and mixing large quantities of food in the iVario Pro L and XL up to a temperature of 120 °C.

4 Boiling and deep-frying basket

The baskets are hooked on the arm of the automatic raising and lowering mechanism, then loaded. At the end of the cooking process, the basket is automatically lifted out of the cooking liquid and the product can drain and be removed effortlessly. Also suitable for small products such as rice. Water can be used multiple times, as nothing needs to be tilted.

• Arm for automatic raising/lowering

The arm for the AutoLift raising and lowering mechanism is placed on the lid. AutoLift raises the products out of the cooking liquid. For precise cooking of boiled, deep-fried or poached products. For up to three large boiling and deep-frying baskets in the iVario Pro XL.

Occional Control Occional Control

Holds back loose cooked products when you drain off liquids. Place the colander on the front side of the pan and the liquid can flow off through the integrated pan valve or be collected by tilting the pan.

Rack

To prevent direct contact between the food to be cooked and the pan base, e.g. for low temperature cooking, the rack is placed on the pan base, and the food on top.

25

Article numbers and more versions on page 40. Article numbers and more versions on page 40.













Special applications.

The great art of boiling.

Portion basket kit

Kit with punched or unpunched 1/6 GN portion baskets including lids (for unpunched baskets only) and a frame. The frame can carry 1/3, 1/6 and 1/9 GN containers. Best used for boiling, deep-frying and keeping smaller quantities warm in restaurants, hotels and in service areas. Place the frame directly on the edge of the pan. The lid prevents the products from cooling and forming skin.

Spaetzle colander

Pan insert for optimal and ergonomic production of pasta, tailored precisely to the pan. Work height relieves pressure on the back.

Transport.

Go from A to B effortlessly. And back again.

• VarioMobil

The 1/1 size is adjustable to four levels. The handle is hinged, so that the VarioMobil can be stored in a space-saving way. The 2/1 size is height-adjustable in two levels for ergonomic working.

2 Basket cart

To easily and safely store, transport and drain GN containers or up to three boiling or deep-frying baskets. Stoppers at the ends of the racks prevent the baskets and containers from slipping out during transportation.

Oil cart

To fill and empty the pan, and to store and to store oil. It has a capacity of 49 litres and pumps the oil directly into the pan. Melt cooking fat or heat cooled oil before filling the pan. When emptying, the oil is returned to the oil cart through a filter. Thanks to the storage, the oil keeps longer.


Article numbers and more versions on page 40. Article numbers and more versions on page 41.










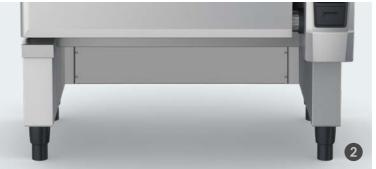







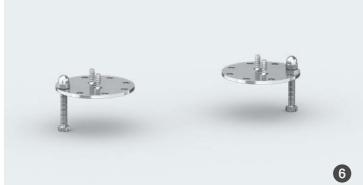

Stands.

Perfectly adjustable.

O Stand

iVario 2-XS and iVario Pro 2-S can be installed directly onto a stand. With integrated pull-out shelves to place iVario Pro 2-S has support rails with locks to store containers and to easily empty the pan. With support rails to store GN containers and accessories. Can be set up flush to the wall, side walls and top closed, rear side open. Various setup variations with feet, stainless steel feet, castors or for plinth installation.

MarineLine stand

The seaworthy MarineLine stand for iVario 2-XS and GN containers safely. Side walls and top closed, rear side open. Can be installed flush with walls. Secure installation due to stainless steel feet with fixing option. Unit attachment kit required.

3 Stand with electric height adjustment

The continuously height-adjustable stand (up to 200 mm) for iVario 2-XS and iVario Pro 2-S supports an ergonomic working height. Easy to operate using the unit display. Integrated pull-out shelves to place your containers, to easily empty the pan. Support rails to store GN containers and accessories. Side panels, top panel and rear enclosed. Flexible drain hose included.

Installation.

More space. Greater security.

• Wall attachment kit

To make it easier to clean underneath the iVario Pro L and XL, it can be mounted on the wall. The position of the wall mounting can be chosen freely and can be adjusted to the physical size of the user.

Panelling for substructure

Veneers the rear area of the substructure and covers the cable and waste water installation for easier cleaning. Can be combined with all substructure variants. Optional extra.

Storage space for substructure

To make efficient use of the space under the iVario Pro L and XL. Consists of up to nine pairs of support rails. Side panels, top panel and rear closed. Can be combined with all substructure variants. Optional extra.

4 Waste water connection kit

Consists of waste water pipes DN 40 or DN 50. Depending on the unit size.

6 Kit for floor fixing

Increase work safety with the iVario Pro L and XL with simple and secure positioning of the cooking system on the floor.

6 Unit attachment kit

To fix the iVario 2-XS or iVario Pro 2-S to an existing worktop or the stand. For secure horizontal and vertical mounting. Compatible with the setup variations with 90 mm and 45 mm plastic feet.

28 Article numbers and more versions on page 41. Article numbers and more versions on page 41.











Care products.

Sparkling clean. Hygienic.

1 Grill cleaner

For slight stains in the pan, such as from tomato sauce, Reorder for the cleaning arm for external cleaning. which are difficult to remove with a simple detergent. Can be used undiluted. Then rinse well.

2 Cleaning arm, incl. 4 pads

Helps clean difficult to reach external areas between the pan and the operating console in the iVario 2-XS and the iVario Pro 2-S. The kit comprises one cleaning arm and four cleaning pads in two degrees of hardness.

10 Hard cleaning pads

For stubborn dirt.

9 Soft cleaning pads

Reorder for the cleaning arm for external cleaning.

6 Cleaning sponge

For effective and fast cleaning of the pan. For all unit



Integrated hand shower is an option.

Grilling, roasting and baking.

300 × 400 mm (for 1/1 GN

400 × 600 mm (for 2/1 GN

(650 x 530 mm) and bakery standard

(325 x 530 mm)

32

	Ņ	
•		_

60.22.493

60.22.492

No. 60.22.491

No.

Perforated baking tray			Granite-enamelled container		
<u> </u>	NI.	60 74 147		Ma	60141202
2/3 GN (325 × 354 mm)	No.	60.74.147	1/2 GN (325 × 265 mm) 20 mm deep	No.	6014.1202
1/1 GN (325 × 530 mm) 2/1 GN (650 × 530 mm)	No.	6015.1103 6015.2103	1/2 GN (325 × 265 mm) 40 mm deep 1/2 GN (325 × 265 mm) 60 mm deep	No.	6014.1204 6014.1206
· · · · · · · · · · · · · · · · · · ·	No.				
Bakery standard (400 × 600 mm)	No.	6015.1000	2/3 GN (325 × 354 mm) 20 mm deep	No.	6014.2302 6014.2304
Roasting and baking trays (unperforated)			2/3 GN (325 × 354 mm) 40 mm deep	No.	6014.2304
2/3 GN (325 × 354 mm)	No.	60.73.671	2/3 GN (325 × 354 mm) 60 mm deep 2/3 GN (325 × 354 mm) 100 mm deep	No.	6014.2310
/1 GN (325 × 530 mm)	No.	6013.1103	1/1 GN (325 × 530 mm) 20 mm deep	No.	6014.1102
2/1 GN (650 × 530 mm)	No.	6013.2103	1/1 GN (325 × 530 mm) 40 mm deep	No.	6014.1104
Bakery standard (400 × 600 mm)	No.	6013.1003	1/1 GN (325 × 530 mm) 60 mm deep	No.	6014.1104
			1/1 GN (325 × 530 mm) 100 mm deep	No.	6014.1110
Grilling and roasting tray			2/1 GN (650 × 530 mm) 20 mm deep	No.	6014.1110
1/1 GN (325 × 530 mm)	No.	60.71.617	2/1 GN (650 × 530 mm) 40 mm deep	No.	6014.2102
Grill and pizza tray			2/1 GN (650 × 530 mm) 60 mm deep	No.	6014.2104
2/3 GN (325 × 354 mm)	No.	60.73.798	Bakery standard (400 × 600 mm) 20 mm deep	No.	6014.1002
/1 GN (325 × 530 mm)	No.	60.70.943	Bakery standard (400 × 600 mm) 40 mm deep	No.	6014.1002
Bakery standard (400 × 600 mm)	No.	60.71.237	Bakery standard (400 × 600 mm) 60 mm deep	No.	6014.1004
Multibaker			,		
		60 70 764			
1/3 GN (325 × 265 mm) 2 moulds	No.	60.73.764			
2/3 GN (325 × 354 mm) 5 moulds	No.	60.73.646			
/1 GN (325 × 530 mm) 8 moulds	No.	60.71.157			
Cross and stripe grill grate			Finishing.		
1/2 GN (325 × 265 mm)	No.	60.73.802	9.		
2/3 GN (325 × 354 mm)	No.	60.73.801	_		
1/1 GN (325 × 530 mm)	No.	60.73.314	Thermocover		
CombiGrill griddle			Model 6-1/1	No.	6004.1007
	No.	6025 1017	Model 10-1/1	No.	6004.1009
1/1 GN (325 × 530 mm)	NO.	6035.1017	Model 6-2/1	No.	6004.1016
oading grid			Model 10-2/1	No.	6004.1014
or CombiGrill griddle 325 × 618 mm	No.	60.73.848	Model 20-1/1	No.	6004.1011
for 1/1 GN)			Model 20-2/1	No.	6004.1012
Roasting and baking pan			System for banqueting		
Small set (4 pcs including carrier tray)	No.	60.73.286	Model 6-1/1, 20 plates	No.	60.61.741
arge set (2 pcs including carrier tray)	No.	60.73.287	Model 10-1/1, 32 plates	No.	60.11.628
Roasting and baking pan, small (ø 16 cm)	No.	60.73.271	Model 10-1/1, 26 plates	No.	60.11.629
Roasting and baking pan, large (ø 25 cm)	No.	60.73.272	Model 6-2/1, 34 plates	No.	60.62.196
Carrier tray for roasting and baking pan, small	No.	60.73.212	Model 10-2/1, 42 plates	No.	60.12.154
Carrier tray for roasting and baking pan large	No.	60.73.216	Model 10-2/1, 52 plates	No.	60.12.155
			Model 20-1/1, 60 plates	No.	60.21.332
Muffin and timbale moulds			Model 20-1/1, 50 plates	No.	60.21.333

No. 6017.1002

No. 6017.1001

Model 20-2/1, 120 plates

Model 20-2/1, 100 plates

Model 20-2/1, 84 plates

Finishing.



Mobile plate rack			Transport trolley Combi-Duo for mobile over	n rack	
Model 6-1/1, 20 plates	No.	60.61.702	For Combi-Duo 6-1/1 and 10-1/1,	No.	60.75.388
Model 6-1/1, 15 plates	No.	60.61.701	Dimensions W 568 D 844 H 1218 – 1418 mm		
Model 10-1/1, 32 plates	No.	60.11.581	For Combi-Duo 6-2/1 and 10-2/1,	No.	60.75.387
Model 10-1/1, 26 plates	No.	60.11.602	Dimensions W 773 D 961	110.	00.7 0.007
Model 6-2/1, 34 plates	No.	60.62.017	H 1218 – 1418 mm		
Model 10-2/1, 52 plates	No.	60.12.022	Transport trolley Standard for mobile oven r	ack	
Model 10-2/1, 42 plates	No.	60.12.062	Standard – 6-1/1, 10-1/1, dimensions	No.	60.74.000
Model 20-1/1, 60 plates	No.	60.21.293	W 548 D 911 H 990 mm		
Model 20-1/1, 50 plates	No.	60.21.294	Height-adjustable – 6-1/1, 10-1/1,	No.	60.75.606
Model 20-2/1, 120 plates	No.	60.22.400	dimensions W 548 D 913 H 800 – 1330 mm		
Model 20-2/1, 100 plates	No.	60.22.399	Standard – 6-2/1, 10-2/1, dimensions	No.	60.73.999
Model 20-2/1, 84 plates	No.	60.22.398	W 735 D 996 H 990 mm	110.	00.70.000
Combi-Duo run-in rail for mobile oven rack			Height-adjustable – 6-2/1, 10-2/1, dimensions W 735 D 990 H 800 –	No.	60.75.605
Model Combi-Duo 6-1/1 and 10-1/1	No.	60.75.761	1330 mm		
Model Combi-Duo 6-2/1 and 10-2/1	No.	60.75.760	Transport trolley for containers		
Run-in rail for mobile oven rack			Transport trolley for integrated fat drain system (Combi-Duo and floor units)	No.	60.73.309
Standard Model 6-1/1, 10-1/1	No.	60.75.115	System (Somer Buo and noor anies)		

No. 60.74.650

Sample calculation with Finishing.

Standard Model 6-2/1, 10-2/1

Capacity Mobile plate rack	Size of event (number of persons)	Mobile plate racks, Thermocovers	Run-in rail	Transport trolley	Max. Plate height in mm	Max. Food height in mm
	15/20	1	1	1	32/25	70/53
15/20 plates* with iCombi Pro 6-1/1	30/40	2	1	2	32/25	70/53
	45/60	3	1	3	32/25	70/53
	52/64	2	1	2	32/25	70/53
26/32 plates* with iCombi Pro 10-1/1	78/96	3	1	3	32/25	70/53
	104/128	4	1	4	32/25	70/53
	24/34	1	1	1	32	61
34 plates* with iCombi Pro 6-2/1	48/68	2	1	2	32	61
	72/102	3	1	3	32	61
	84/104	2	1	2	40/32	82/63
42/52 plates* with iCombi Pro 10-2/1	126/156	3	1	3	40/32	82/63
	168/208	4	1	4	40/32	82/63
	100/120	2	_	-	32/25	67/52
50/60 plates* with iCombi Pro 20-1/1	150/180	3	-	-	32/25	67/52
, ,	200/240	4	-	-	32/25	67/52
	168/200/240	2	-	-	40/32/25	79/65/52
84/100/120 plates* with iCombi Pro 20-2/1	252/300/360	3	-	-	40/32/25	79/65/52
	336/400/480	4	-	-	40/32/25	79/65/52

*Plate size up to 31 cm diameter

Mobile oven racks and hinging racks.

No. 60.73.724

Mobile oven rack Model 6-1/1		
Standard, 6 racks (rail distance 64 mm)	No.	60.61.420
Bakery standard (400 × 600 mm), 5 racks (rail distance 77 mm)*	No.	60.61.690
Mobile oven rack Model 10-1/1		
Standard, 10 racks (rail distance 64 mm)	No.	60.11.600
8 racks (rail distance 80 mm)	No.	60.11.601
Bakery standard (400 \times 600 mm), 8 racks (rail distance 81 mm)*	No.	60.11.599
Mobile oven rack Model 6-2/1		
Standard, 6 racks (rail distance 64 mm)	No.	60.62.150
Mobile oven rack Model 10-2/1		
Standard, 10 racks (rail distance 63 mm)	No.	60.12.150
Mobile oven rack Model 20-1/1		
Mobile oven rack Model 20-1/1 Standard, 20 racks (rail distance 65 mm)	No.	60.21.331
·	No.	60.21.331 60.21.287
Standard, 20 racks (rail distance 65 mm)		
Standard, 20 racks (rail distance 65 mm) 15 racks (rail distance 84 mm)	No.	60.21.287
Standard, 20 racks (rail distance 65 mm) 15 racks (rail distance 84 mm) 16 racks (rail distance 80 mm)	No.	60.21.287
Standard, 20 racks (rail distance 65 mm) 15 racks (rail distance 84 mm) 16 racks (rail distance 80 mm) 17 racks (rail distance 74 mm) Bakery standard (400 × 600 mm), 16 racks	No. No.	60.21.287 60.21.288 60.21.289
Standard, 20 racks (rail distance 65 mm) 15 racks (rail distance 84 mm) 16 racks (rail distance 80 mm) 17 racks (rail distance 74 mm) Bakery standard (400 × 600 mm), 16 racks (rail distance 81 mm)* 20 racks, max. rack height 1.60 m	No. No. No.	60.21.287 60.21.288 60.21.289 60.21.292
Standard, 20 racks (rail distance 65 mm) 15 racks (rail distance 84 mm) 16 racks (rail distance 80 mm) 17 racks (rail distance 74 mm) Bakery standard (400 × 600 mm), 16 racks (rail distance 81 mm)* 20 racks, max. rack height 1.60 m (rail distance 62 mm)	No. No. No.	60.21.287 60.21.288 60.21.289 60.21.292
Standard, 20 racks (rail distance 65 mm) 15 racks (rail distance 84 mm) 16 racks (rail distance 80 mm) 17 racks (rail distance 74 mm) Bakery standard (400 × 600 mm), 16 racks (rail distance 81 mm)* 20 racks, max. rack height 1.60 m (rail distance 62 mm) Mobile oven rack Model 20-2/1	No. No. No. No.	60.21.287 60.21.288 60.21.289 60.21.292 60.21.245
Standard, 20 racks (rail distance 65 mm) 15 racks (rail distance 84 mm) 16 racks (rail distance 80 mm) 17 racks (rail distance 74 mm) Bakery standard (400 × 600 mm), 16 racks (rail distance 81 mm)* 20 racks, max. rack height 1.60 m (rail distance 62 mm) Mobile oven rack Model 20-2/1 Standard, 20 racks (rail distance 65 mm)	No. No. No. No.	60.21.287 60.21.288 60.21.289 60.21.292 60.21.245

20 racks, max. rack height 1.60 m (rail

distance 62 mm)

Hinging rack Model XS 6-2/3

Standard

Hinging rack Model 6-1/1		
Standard, 6 racks (rail distance 68 mm)	No.	60.61.373
5 racks (rail distance 85 mm)	No.	60.61.615
Chicken grill, 2 racks	No.	60.61.645
Meat trays, 6 racks (rail distance 72 mm)	No.	60.61.649
Bakery standard (400 \times 600 mm), 5 racks (rail distance 86 mm)*	No.	60.61.576
Combi rack, bakery standard combined with 1/1 GN, 4 racks (rail distance 95 mm)*	No.	60.61.642

Hinging rack Model 10-1/1

Standard, 10 racks (rail distance 68 mm)	No.	60.11.447
8 racks (rail distance 85 mm)	No.	60.11.547
Chicken grill, 3 racks	No.	60.11.566
Meat trays, 10 racks (rail distance 72 mm)	No.	60.11.570
Bakery standard (400 \times 600 mm), 8 racks (rail distance 90 mm)*	No.	60.11.541
Combi rack, bakery standard combined with 1/1 GN, 7 racks (rail distance 95 mm)*	No.	60.11.563

Hinging rack Model 6-2/1

Standard, 6 racks (rail distance 68 mm)	No.	60.62.123
5 racks (rail distance 85 mm)	No.	60.62.171
7 racks without L rails (rail distance 65 mm)	No.	60.62.168

Hinging rack Model 10-2/1

Standard, 10 racks (rail distance 68 mm)	No.	60.12.133
--	-----	-----------

* Please note that different air baffles are used in the cooking cabinet with GN versions and 400 × 600 mm bakery standard versions. The air baffle can be obtained from your Service Partner as a spare part, if it is not ordered as an option when the unit is purchased.

No. 60.22.368

GN accessories.

1/1 GN (325 × 530 mm) 55 mm deep

Special applications.

No. 6015.1165



Rust-free stainless steel perforated container

-		
Rust-free stainless steel container		
2/3 GN (325 × 354 mm) 20 mm deep	No.	6013.2302
2/3 GN (325 × 354 mm) 65 mm deep	No.	6013.2306
1/1 GN (325 × 530 mm) 20 mm deep	No.	6013.1102
1/1 GN (325 × 530 mm) 40 mm deep	No.	6013.1104
1/1 GN (325 × 530 mm) 65 mm deep	No.	6013.1106
Stainless steel grid		
2 /2 CN /225 25 /	AL.	CO10 2201

2/3 GN (325 × 354 mm)	No.	6010.2301
1/1 GN (325 × 530 mm)	No.	6010.1101
2/1 GN (650 × 530 mm)	No.	6010.2101
Bakery standard (400 × 600 mm)	No.	6010.0103

Dripping tray with drain lock

• .		
1/1 GN (325 × 530 mm)	No.	8710.1135
2/1 GN (650 × 530 mm)	No.	60.70.776

Chicken and duck superspike

Capacity 4 pcs, max. weight 1,300 g, 1/2 GN (325 × 265 mm)	No.	6035.1015
Capacity 6 pcs, max. weight 1,800 g, 1/1 GN (325 × 530 mm)	No.	6035.1016
Capacity 8 pcs, max. weight 1,300 g, 1/1 GN (325 × 530 mm)	No.	6035.1006
Capacity 10 pcs, max. weight 950 g, 1/1 GN (325 × 530 mm)	No.	6035.1010
Capacity: 8 pcs, max. weight 2,200 g, 1/1 GN (325 × 530 mm)	No.	6035.1009

CombiFry

1/2 GN (325 × 265 mm)	No.	6019.1250
2/3 GN (325 × 354 mm)	No.	60.73.619
1/1 GN (325 × 530 mm)	No.	6019.1150

Rib rack

1/1 GN (325 × 530 mm) No. 6035.1018			
	1/1 GN (325 × 530 mm)	No.	6035.1018

Grill and tandoori skewer

Grill and tandoori skewer frame 2/3 GN	No.	60.74.963
Grill and tandoori skewer frame 1/1 GN	No.	60.72.224
Set 2/3 GN (1× skewer frame and five different skewers)	No.	60.75.782
Set 1/1 GN (1× skewer frame and five different skewers)	No.	60.72.414
$5\times$ skewers O 5 mm, 265 mm long for 2/3 GN	No.	60.75.783
$5\times$ skewers \square 5 mm, 265 mm long for 2/3 GN	No.	60.75.784
$5\times$ fish skewers 4 \times 10 mm, 265 mm long for 2/3 GN	No.	60.75.785
$3\times$ skewers O 5 mm, 530 mm long for 1/1 GN	No.	60.72.416
$3\times$ skewers O 8 mm, 530 mm long for 1/1 GN	No.	60.72.417
$3\times$ skewers \square 5 mm, 530 mm long for $1/1$ GN	No.	60.72.418
$3\times$ skewers \square 8 mm, 530 mm long for $1/1$ GN	No.	60.72.419
$3\times$ fish skewers 4×10 mm, 530 mm long for $1/1$ GN	No.	60.72.420

Potato baker

1/1 GN (325 × 530 mm) No	6035.1019
--------------------------	-----------

Lamb and suckling pig spit (1 lamb or 1 suckling pig)

Model 10-1/1, 10-2/1, 20-1/1, 20-2/1 to 12 kg (1/1 GN)	No.	60.70.819
Model 20-1/1 to 30 kg (1 skewer with carrier)	No.	6035.1003
Model 20-2/1 to 30 kg (1 skewer with carrier, second skewer for lamb or suckling pig optional)	No.	6035.1002
Optional skewer	No.	8710.1065

Pizza pan

Pizza up to Ø 280 mm	No	60.71.158
F122a up to 60 200 HHH	INO.	00.7 1.130



Combi-Duo kit for iCombi Pro XS 6-2/3 and CombiMaster Plus XS 6-2/3

Model XS 6-2/3 on Model XS 6-2/3 right-sided hinge	No.	60.73.768
Model XS 6-2/3 on Model XS 6-2/3 left-sided hinge	No.	60.74.276

Combi-Duo kit for iCombi Pro 6-1/1 and 10-1/1

Model 6-1/1 E/G on Model 6-1/1 E Model 6-1/1 E/G on Model 10-1/1 E	No.	60.73.991
Unit size 6-1/1 E/G on unit size 6-1/1 G Unit size XS 6-2/3 on unit size 6-1/1 G	No.	60.75.751
Unit size XS 6-2/3 on unit size 6-1/1 E Unit size XS 6-2/3 on unit size 10-1/1 E	No.	60.75.755

Combi-Duo kit for 6-2/1 and 10-2/1

combi backiero c 2, rana ro 2, r		
Model 6-2/1 E/G on Model 6-2/1 E Model 6-2/1 E/G on Model 10-2/1 E	No.	60.74.725
Unit size 6-2/1 E/G on unit size 6-2/1 G Unit size 6-1/1 E/G on unit size 6-2/1 G Unit size XS 6-2/3 on 6-2/1 G	No.	60.75.752
Unit size 6-1/1 E/G on unit size 6-2/1 E Unit size XS 6-2/3 on unit size 6-2/1 E Unit size XS 6-2/3 on unit size 10-2/1 E	No.	60.75.756

Setup variations for Combi-Duo

Levelling kit Model 6-1/1, 10-1/1, dimensions W 850 D 614 H 34 mm	No.	60.74.795
Levelling kit Model 6-2/1, 10-2/1, Dimensions W 1072 D 814 H 34 mm	No.	60.74.597
Kit with castors, unit sizes 6-1/1, 10-1/1, dimensions W 884 D 656 H 85 mm	No.	60.31.622
Kit with castors, unit sizes 6-2/1, 10-2/1, dimensions W 1106 D 856 H 85 mm	No.	60.31.635
Substructure with feet, unit sizes 6-1/1, 10-1/1, dimensions W 870 D 635 H 152 mm	No.	60.31.668
Substructure with feet, unit sizes 6-2/1, 10-2/1, dimensions W 1092 D 835 H 152 mm	No.	60.31.671
Stand I for Combi-Duo XS 6-2/3, standard, dimensions W 639 D 563 H 555 mm	No.	60.31.020
Stand II for Combi-Duo XS 6-2/3, standard, dimensions W 639 D 563 H 557 mm	No.	60.31.046
Stand I for Combi-Duo 6-1/1 on 6-1/1 and on 10-1/1 E, standard, dimensions W 860 D 685 H 200 mm	No.	60.31.200
Stand I for Combi-Duo 6-2/1 on 6-2/1 and on 10-2/1 E, standard, dimensions W 1082 D 885 H 200 mm	No.	60.31.203
Stand I for Combi-Duo XS 6-2/3, with castors, dimensions W 663 D 641 H 562 mm	No.	60.31.170
Stand I for Combi-Duo 6-1/1 on 6-1/1 and on 10-1/1 E, with castors, dimensions W 884 D 763 H 200 mm	No.	60.31.201
Stand I for Combi-Duo 6-2/1 on 6-2/1 and on 10-2/1 E, with castors, dimensions W 1106 D 963 H 200 mm	No.	60.31.204

Combi-Duo.

Setup variations.



Hinging rack Combi-Duo Model 6-1/1

Combi-Duo version, 5+1 racks (top rack is	No.	60.61.678
removable for a max. rack height of 1.60 m,		
with floor setup 6-1/1 E on 10-1/1 E)		

Hinging rack Combi-Duo Model 6-2/1

Combi-Duo version, 5+1 racks (top rack is	No.	60.62.188	
removable for a max. rack height of 1.60 m,			
with floor setup 6-2/1 E on 10-2/1 E)			

Integrated fat drain kit for Combi-Duo

to be set up on the levelling kit Combi-Duo 6-1/1 and 10-1/1	No.	60.75.873
to be set up on Stand I Combi-Duo 6-1/1 and 10-1/1	No.	60.75.406
to be set up on the levelling kit Combi-Duo 6-2/1 and 10-2/1	No.	60.75.876
to be set up on Stand I Combi-Duo 6-2/1 and 10-2/1	No.	60.75.411

Installation kit

UltraVent XS including installation kit	No.	60.74.063
UltraVent Plus XS including installation kit	No.	60.74.405

MobilityLine floor unit

Mobile base frame 20-1/1	No.	60.21.334
Mobile base frame 20-2/1	No.	60.22.496

Networking.

WiFi adapter

WiFi adapter set for tabletop units	No.	60.76.714
WiFi adapter set for floor units	No.	60.76.603

Extras.

VarioSmoker

VarioSmoker Model G	No.	60.75.373			
USB core probe					
Sous-vide core probe for tabletop and floor units	No.	60.76.316			
1 external core probe for tabletop units	No.	60.76.317			
1 external core probe for floor units	No.	60.76.318			
Extension set for USB core probes	No.	60.76.876			
Positioning aid for core probe					
Model 6-1/1, 10-1/1, 6-2/1, 10-2/1, 20-1/1 and 20-2/1	No.	60.71.022			
Pull-out rails for hinging racks with 68 mm ra	nil spaciı	ng			
For iCombi Pro and iCombi Classic, Model 6-1/1, 10-1/1	N°:	60.76.894			
For SelfCookingCenter and CombiMaster Plus (from 09/2011), Model 61, 101	N°:	60.76.897			

Exhaust air technology.

Extraction hood, UltraVent and UltraVent Plus

Extraction hood, UltraVent and UltraVent Plus		
UltraVent XS Combi-Duo	No.	60.73.943
UltraVent Plus XS Combi-Duo	No.	60.74.404
UltraVent Combi-Duo Model 6-1/1, 10-1/1	No.	60.76.169
UltraVent Plus Combi-Duo Model 6-1/1, 10-1/1	No.	60.76.173
Extraction hood Combi-Duo Model 6-1/1, 10-1/1	No.	60.76.221
UltraVent Combi-Duo Model 6-2/1, 10-2/1	No.	60.76.170
UltraVent Plus Combi-Duo Model 6-2/1, 10-2/1	No.	60.76.174
Extraction hood Combi-Duo Model 6-2/1, 10-2/1	No.	60.76.222
UltraVent, Model XS 6-2/3	No.	60.73.865
UltraVent Plus, Model XS 6-2/3	No.	60.74.394
UltraVent, Model 6-1/1, 10-1/1	No.	60.75.134
UltraVent Plus, Model 6-1/1, 10-1/1	No.	60.75.142
Extraction hood, Model 6-1/1, 10-1/1	No.	60.76.217
UltraVent, Model 6-2/1, 10-2/1	No.	60.75.135
UltraVent Plus, Model 6-2/1, 10-2/1	No.	60.75.143
Extraction hood, Model 6-2/1, 10-2/1	No.	60.76.218
UltraVent, Model 20-1/1	No.	60.75.136
UltraVent, Model 20-2/1	No.	60.75.137
Extraction hood, Model 20-1/1	No.	60.76.219

Stands.



Installation accessories.



Stand Model XS 6-2/3

Stand XS, standard, W 629 D 438 H 148 mm	No.	60.31.029
Stand I, standard, dimensions W 639 D 563 H 931 mm	No.	60.31.018
Stand I, with castors, dimensions W 663 D 641 H 938 mm	No.	60.31.169
Stand II, standard, dimensions W 639 D 563 H 932 mm	No.	60.31.044

Levelling kit and stands Model 6-1/1 and 10-1/1

	Levelling kit and stands Model 6-1/1 and 10)-1/1	
	Levelling kit, unit sizes 6-1/1, 10-1/1, dimensions W 850 D 614 H 34 mm	No.	60.74.795
	Kit with castors, unit sizes 6-1/1, 10-1/1, dimensions W 884 D 656 H 85 mm	No.	60.31.622
	Substructure with feet, unit sizes 6-1/1, 10-1/1, dimensions W 870 D 635 H 152 mm	No.	60.31.668
	Stand I, standard, Dimensions W 860 D 685 H 699 mm	No.	60.31.089
	Stand I, with castors, Dimensions W 884 D 763 H 699 mm	No.	60.31.095
	Stand II, standard, Dimensions W 860 D 703 H 699 mm	No.	60.31.086
	Stand II, with castors, Dimensions W 884 D 769 H 699 mm	No.	60.31.103
	Stand II, bakery standard, standard, dimensions W 860 D 703 H 699 mm	No.	60.31.209
	Stand II, bakery standard, with castors, dimensions W 884 D 769 H 699 mm	No.	60.31.210
	Stand II, bakery standard, UltraVent version, standard, dimensions W 860 D 703 H 945 mm	No.	60.31.212
	Stand II, bakery standard, UltraVent version, with castors, dimensions W 884 D 769 H 945 mm	No.	60.31.213
	Stand II, MobilityLine, dimensions W 1199 D 894 H 789 mm	No.	60.31.164
	Stand III, standard, dimensions W 860 D 703 H 699 mm	No.	60.31.091
	Stand III, with castors, dimensions W 883 D 769 H 699 mm	No.	60.31.105
	Stand III, UltraVent version, standard, dimensions W 860 D 703 H 945 mm	No.	60.31.214

Levelling kit and stand Model 6-1/1 and 10-1/1

Stand III, UltraVent version, with castors, dimensions W 884 D 769 H 945 mm	No.	60.31.215
Stand IV, standard, dimensions W 860 D 703 H 699 mm	No.	60.31.093
Stand IV, with castors, dimensions W 884 D 769 H 699 mm	No.	60.31.107

Levelling kit and stand Model 6-2/1 and 10	-2/1	
Levelling kit, unit sizes 6-1/1, 10-1/1, dimensions W 850 D 614 H 34 mm	No.	60.74.597
Kit with castors, unit sizes 6-2/1, 10-2/1, dimensions W 1106 D 856 H 85 mm	No.	60.31.635
Substructure with feet, unit sizes 6-2/1, 10-2/1, dimensions W 1092 D 835 H 152 mm	No.	60.31.671
Stand I, standard, dimensions W 1082 D 885 H 699 mm	No.	60.31.090
Stand I, with castors, Dimensions W 1106 D 963 H 699 mm	No.	60.31.102
Stand II, standard, Dimensions W 1082 D 903 H 699 mm	No.	60.31.087
Stand II, with castors, Dimensions W 1106 D 969 H 699 mm	No.	60.31.104
Stand II, MobilityLine, dimensions W 1421 D 1094 H 789 mm	No.	60.31.165
Stand III, standard, dimensions W 1082 D 903 H 699 mm	No.	60.31.092
Stand III, with castors, dimensions W 1105 D 969 H 699 mm	No.	60.31.106
Stand III, UltraVent version, standard, dimensions W 1082 D 903 H 945 mm	No.	60.31.216
Stand III, UltraVent version, with castors, dimensions W 1106 D 969 H 945 mm	No.	60.31.217
Stand IV, standard, dimensions W 1082 D 903 H 699 mm	No.	60.31.094
Stand IV, with castors, Dimensions W 1106 D 969 H 699 mm	No.	60.31.108

Trolley levelling	davica	for mobile	oven rack

Model 20-1/1	No.	60.21.262
Model 20-2/1	No.	60.22.380
Unit raiser		
Model 20-1/1, 20-2/1	No.	60.70.407
Raiser for mobile oven rack		
Model 20-1/1	No.	60.21.297

Heat shield for side panel

Model 20-2/1

Left heat shield, Model XS 6-2/3	No.	60.74.18
Left heat shield, Model 6-1/1	No.	60.75.110
Right heat shield, Model 6-1/1	No.	60.75.113
Left heat shield, Model 10-1/1	No.	60.75.77
Right heat shield, Model 10-1/1	No.	60.75.77
Left heat shield, Model 6-2/1	No.	60.75.769
Right heat shield, Model 6-2/1	No.	60.75.76
Left heat shield, Model 10-2/1	No.	60.75.77
Right heat shield, Model 10-2/1	No.	60.75.77
Left heat shield, Model 20-1/1	No.	60.75.829
Left heat shield, Model 20-2/1	No.	60.75.82

Flow guard for gas units

Model 6-1/1	No.	70.01.339
Model 10-1/1	No.	70.01.340
Model 6-2/1	No.	70.01.431
Model 10-2/1	No.	70.01.582
Model 20-1/1	No.	70.01.583
Model 20-2/1	No.	70.01.492

Flue gas collector for gas units

Model 6-1/1	No.	70.01.360
Model 10-1/1	No.	70.01.376
Model 6-2/1	No.	70.01.432
Model 10-2/1	No.	70.01.586
Model 20-1/1	No.	70.01.587
Model 20-2/1	No.	70.01.493

Handle holder for mobile oven rack

Model 20-1/1, 20-2/1 No.	60.75.895
--------------------------	-----------

Unit connection kit

Model XS 6-2/3, 6-1/1, 10-1/1, 6-2/1,	No.	60.70.464
10-2/1, 20-1/1, 20-2/1		

Condensation breaker

Model XS 6-2/3 (H 438 mm)	No.	60.74.037
Model 6-1/1, 10-1/1, 6-2/1 and 10-2/1 (H 458 mm)	No.	60.72.592
Model 20-1/1 and 20-2/1 (H 480 mm)	No.	60.75.326
Wall mounting		

Model XS 6-2/3	No.	60.30.968
Model 6-1/1	No.	60.31.168

Table extension

60.22.386

No.

Model 6-1/1, 10-1/1	No.	60.11.655
1410aci 0 1/ 1, 10 1/ 1	140.	00.11.000

Care products.

Active Green cleaner tab (for iCombi Pro and iCombi Classic)

Cleaner tab (for all SelfCookingCenter and CombiMaster Plus)

Cleaner tabs.	100 ncs	No	56.00.210
Cicalici tabs,	100 pcs	INO.	30.00.210

Care tab (for iCombi Pro, iCombi Classic and SelfCookingCenter with Efficient CareCentral)

with Efficient CareControl)		
Care tabs, 150 pcs	No.	56.00.562

Rinse aid tab (for SelfCookingCenter units without Efficient CareControl and CombiMaster Plus)

Rinse aid tabs. 50 pcs	No.	56.00.211

Defoamer tab (for all iCombi Pro, iCombi Classic, SelfCookingCenter and CombiMaster Plus)

Defoamer tabs, 120 pcs	No.	56.00.598
------------------------	-----	-----------

Liquid cleaner (for all CombiMaster and ClimaPlus Combi units)

Special cleaner soft (for all CombiMaster and ClimaPlus Combi units)	No.	9006.0136
Grill cleaner (for all CombiMaster and ClimaPlus Combi units)	No.	9006.0153
Liquid rinsing chemical (for ClimaPlus Combi with CleanJet)	No.	9006.0137

Descaler (for SelfCookingCenter without CareControl, CombiMaster, ClimaPlus Combi)

Descaler, 10 litres	No.	6006.0110
Foot pump for descaling the steam	No.	6004.0203
generator		

Handheld pressure sprayer

Handheld pressure sprayer for manual	No.	6004.0100
cleaning		

The basis for everything.

Special application.



Portion baskets Model 2-XS

No. 60.71.643

60.73.348

60.73.586

Kit 4 punched 1/6 GN portion baskets + portion basket frame	No.	60.75.300
Kit 4 unpunched 1/6 GN portion baskets with lid + portion basket frame	No.	60.75.978
Kit 4 deep-frying 1/6 GN portion baskets + portion basket frame	No.	60.75.979
Portion baskets kit (4 punched + 4 unpunched 1/6 GN portion baskets with lid + 2 portion basket frame)	No.	60.76.407

Portion baskets Model 2-S

Kit 6 punched 1/6 GN portion baskets + portion basket frame	No.	60.75.305
Kit 6 unpuched 1/6 GN portion baskets with lid + portion basket frame	No.	60.75.306
Kit 6 deep-frying 1/6 GN portion baskets + portion basket frame	No.	60.75.307
Portion baskets kit (6 punched + 6 unpunched 1/6 GN portion baskets with lid + 2 portion basket frame)	No.	60.76.408

Kit of 2 portion baskets

Kit 2 punched 1/6 GN portion baskets	No.	60.75.303
Kit 2 unpunched 1/6 GN portion baskets with lid	No.	60.75.302
Kit 2 deep-frying 1/6 GN portion baskets	No.	60.75.982
Kit 2 lids for portion basket 1/6 GN	No.	60.75.311

Spaetzle colander

Model 2-XS, 2-S	No.	60.74.958
Model L, XL	No.	60.75.629

Stir spatula

Unperforated, Model 2-S, L, XL

Perforated, Model 2-S, L, XL

Model L, XL	No.	60.72.131

Boiling basket

Scraper

Scoop

Model 2-XS, 2-S, L, XL

Boiling basket Model 2-XS	No.	60.74.970
Boiling basket Model 2-S	No.	60.74.986
Boiling basket Model L, XL (Recommendation: 2× for L and 3× for XL)	No.	60.74.983

Deep-frying basket

Deep-frying basket Model 2-XS	No.	60.75.019
Deep-frying basket Model 2-S	No.	60.75.330
Deep-frying basket Model L, XL (Recommendation: 2× for L and 3× for XL)	No.	60.75.391

Arm for automatic raising/lowering

Model 2-XS	No.	60.74.791
Model 2-S	No.	60.75.359
Model L	No.	60.75.909
Model XL	No.	60.75.129

Colander

Model 2-XS, 2-S	No.	60.74.666
Model L	No.	60.75.975
Model XL	No.	60.74.908

Rack

Model 2-XS	No.	60.74.832
Model 2-S, L, XL	No.	60.74.663

Networking.

WiFi adapter

WiFi adapter set for tabletop units	No.	60.76.714
WiFi adapter set for floor units	No.	60.76.603

Stands.

Care products.

ducts.

Stand Model 2-XS

With feet Dimensions W 1100 D 717 H 595 mm	No.	60.31.221
With stainless steel feet Dimensions W 1130 D 717 H 595 mm	No.	60.31.538
With castors Dimensions W 1145 D 717 H 595 mm	No.	60.31.317
For plinth installation Dimensions W 1100 D 717 H 464 mm	No.	60.31.540
MarineLine* Dimensions W 1100 D 694 H 595 mm	No.	60.31.701
With electric height adjustment Dimensions W 1100 D 713 H 570 – 770 mm	No.	60.31.326

Stand Model 2-S		
With feet Dimensions W 1100 D 899 H 595 mm	No.	60.31.319
With stainless steel feet Dimensions W 1130 D 899 H 595 mm	No.	60.31.539
With castors Dimensions W 1145 D 899 H 595 mm	No.	60.31.320
For plinth installation Dimensions W 1100 D 899 H 464 mm	No.	60.31.541
MarineLine* Dimensions W 1100 D 876 H 595 mm	No.	60.31.702
With electric height adjustment Dimensions W 1100 D 895 H 570 – 770 mm	No.	60.31.327

 $^{^{\}ast}$ Kit 60.76.118 required to attach the iVario to the stand.

Grill cleaner

Grill cleaner, 10 I	No.	9006.0153
Cleaning arm		
Cleaning arm, incl. 4 pads	No.	60.73.925
Cleaning pads		
Kit of 2 hard cleaning pads	No.	60.73.922
Kit of 2 soft cleaning pads	No.	60.73.923
Cleaning sponges		
Kit of 6 cleaning sponges	No.	60.73.924
Cleaning kit		

10 I grill cleaner, 1 cleaning arm, 2 hard cleaning pads, 2 soft cleaning pads, 1 cleaning sponge	No.	60.73.92

Installation.

Wall attachment kit

Panelling for substructure

Model L

Model XL

Model L	No.	60.75.993	
Model XL	No.	60.75.934	
Kit for floor fixing			
Model L, XL	No.	60.72.905	
Unit attachment kit			
Model 2-XS, 2-S	No.	60.76.118	
Waste water connection kit			
Model 2-XS, 2-S	No.	87.00.745	
Model L, XL	No.	87.00.746	
Storage space for substructure			
Model L		On request	
Model XL		On request	•

Transport.

VarioMobil


On request

On request

1/1 GN Model 2-XS, 2-S Dimensions W 425 D 756 H 799 mm	No.	60.73.349
2/1 GN Model L, XL Dimensions W 635 D 790 H 887 mm	No.	60.70.107
Basket cart		
Model 2-S, L, XL Dimensions W 418 D 692 H 1522 mm	No.	60.73.612
Oil cart		
Model L, XL Dimensions W 603 D 655 H 1085 mm	No.	60.74.941

♦ More information on original RATIONAL accessories at:

rational-online.com/gb/accessories

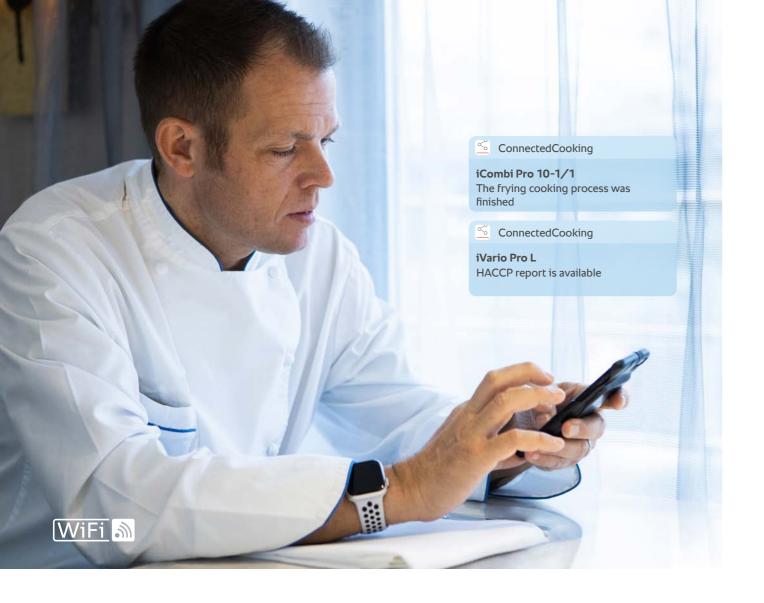

ConnectedCooking.

All under control.

ConnectedCooking Powerful networking by RATIONAL. Always keeps everything under control.

> rational-online.com/gb/ ConnectedCooking

Networking is moving forward – it all runs digitally, and it is all synchronised. Just like ConnectedCooking by RATIONAL. Recipe transfer, unit control, hygiene data, software updates and service remote access with the secure networking solution you can control everything from your desk. For all connected appliances. You can also access and save HACCP data from all appliances. Recipes travel at the touch of a button to the cooking systems. All you need is a PC, smartphone or tablet.

And maybe a WiFi adapter set suitable for the kitchen: so that you can extend your WiFi network to a separate kitchen network with several cooking systems from different device generations. Allowing your cooking systems stay connected even with a weak WiFi signal. Networking could not be easier.

RATIONAL accessories.

Robust. Durable. Tough.

Company	Contact person	
Street	Post code, city	
Phone	Fax	
E-mail		

♦ Contact your RATIONAL representative +44 1582 480388

info@rational-online.co.uk

Quote – please complete accordingly.

Item name	Article	number Gastron	orm Quantity

Unit 4 Titan Court, Laporte Way Luton, LU4 8EF United Kingdom

Tel. +44 1582 480388 Fax +44 1582 485001

info@rational-online.co.uk rational-online.com









